


pure productivity

durable. effective. filter.

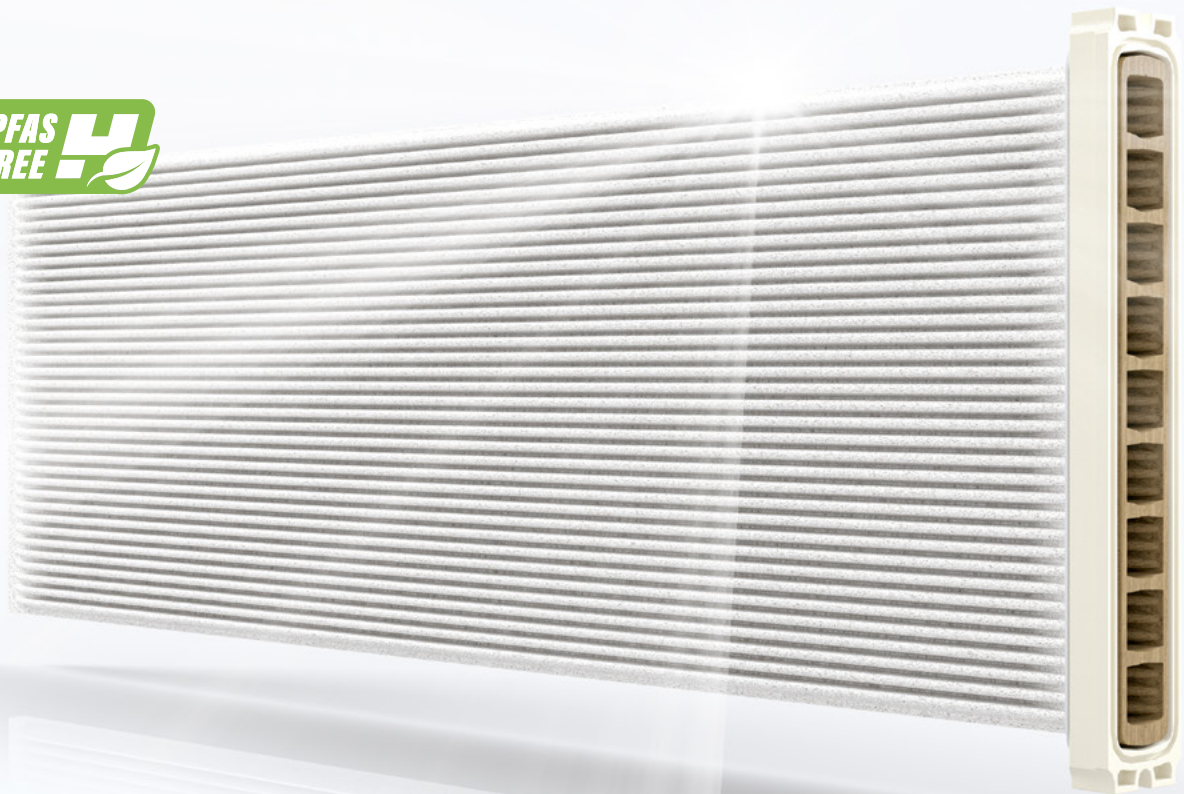

HERDING **BETA** UP TO 160° C

THE ORIGINAL
BY HERDING



made in germany



BENEFITS

HERDING BETA - UP TO 160°C

The patented Herding BETA provides proven Herding technology for numerous applications in temperature ranges of up to 160°C. Due to the reliable separation, even of finest particles, only a very low residual dust concentration of $< 0.5 \text{ mg/Am}^3$ remains after filtration. With PFAS-free, future-proof and sustainable.

The Herding BETA is a dust Ex zone barrier according to VDI 2263 and has a high chemical and remarkable pH resistance (1-10). Sterilization is possible without any problems.

The filter elements are tested at a hundred percent rate and stand out due to the effective product separation on the surface - pure surface filtration with constant operation conditions.

**CONTINUOUS TEMPERATURE
UP TO 160°C**



**FOOD
COMPLIANT ***

**COMPACT
DESIGN**



**DURABLE
LONG SERVICE LIFE**

**RESISTANT AGAINST
HYDROLYSIS AND CHEMICALS**



**PRODUCT RECOVERY
WITHOUT CONTAMINATION**

**ENERGY EFFICIENCY DUE TO
LOW CLEANING PRESSURE**



**CONSTANT OPERATING
CONDITIONS**


* Filter size-dependent and in accordance with the European Directive

FILTER ELEMENT HEAD

PREPREG head frame
made from one piece

Molded to filter body

RFID Transponder &
Serialnumber



FILTER BODY


Sintered PPS
(Polyphenylene sulfide)

Compact rigid body

Self-extinguishing material


Surface coating

Microporous, filter-active layer
embedded into filter body surface



FILTER GASKET

Proven, temperature
resistant design



FILTER FOOT

One sintered body
One elongation
One material



HERDING BETA - PURE PRODUCTIVITY

Herding® filter technology protects man and machine. It serves occupational and environmental safety as well as recovers valuable material from the process. Lowest clean gas values, constant operating conditions, highest availability and energy efficiency are the characteristics of the innovative technology.

We produce the patented sinter-plate filter media as well as complete standard filter units (standard or customized design) in our own manufacturing facilities.

HERDING MAXX

For very high air flows



HERDING PROCESS

The series for highest expectations



HERDING RESIST

For applications with high requirements on pressure resistance and easy cleanability





CONTACT

Please feel free to contact us! You can fill out the form and send it to us.

Company

First name

Family name

Phone

E-Mail

Branch

Application

Comments

Herding® is a registered trademark// V.1.8

August-Borsig-Str. 3
92224 Amberg
Germany

Phone: +49 9621 630-0
Mail: beta@herding.de
www.herding.com

FOLLOW US ON

